View - Identification
Target - 5 m ... 300 PPM
120% of screen height HFOV 60°

View - Recognition
Target - 7 m ... 125 PPM
50% of screen height HFOV 70°


View - Observation
Target - 10 m ... 63.5 PPM
25% of screen height HFOV 90°

View - Detection
Target - 30 m ... 25 PPM
10% of screen height HFOV 90°

View - Monitoring
Target - 50 m ... 12.5 PPM
5% of screen height HFOV 90°

CAMERA NAMING CONVENTION:

XX - TOWER
XXX- IDF OR MDF
XX - IDF LEVEL LOCATION
XX - FLOOR LEVEL
CAM - VIDEO SURVEILLANCE CAMERA
XXX- CAMERA NUMBER

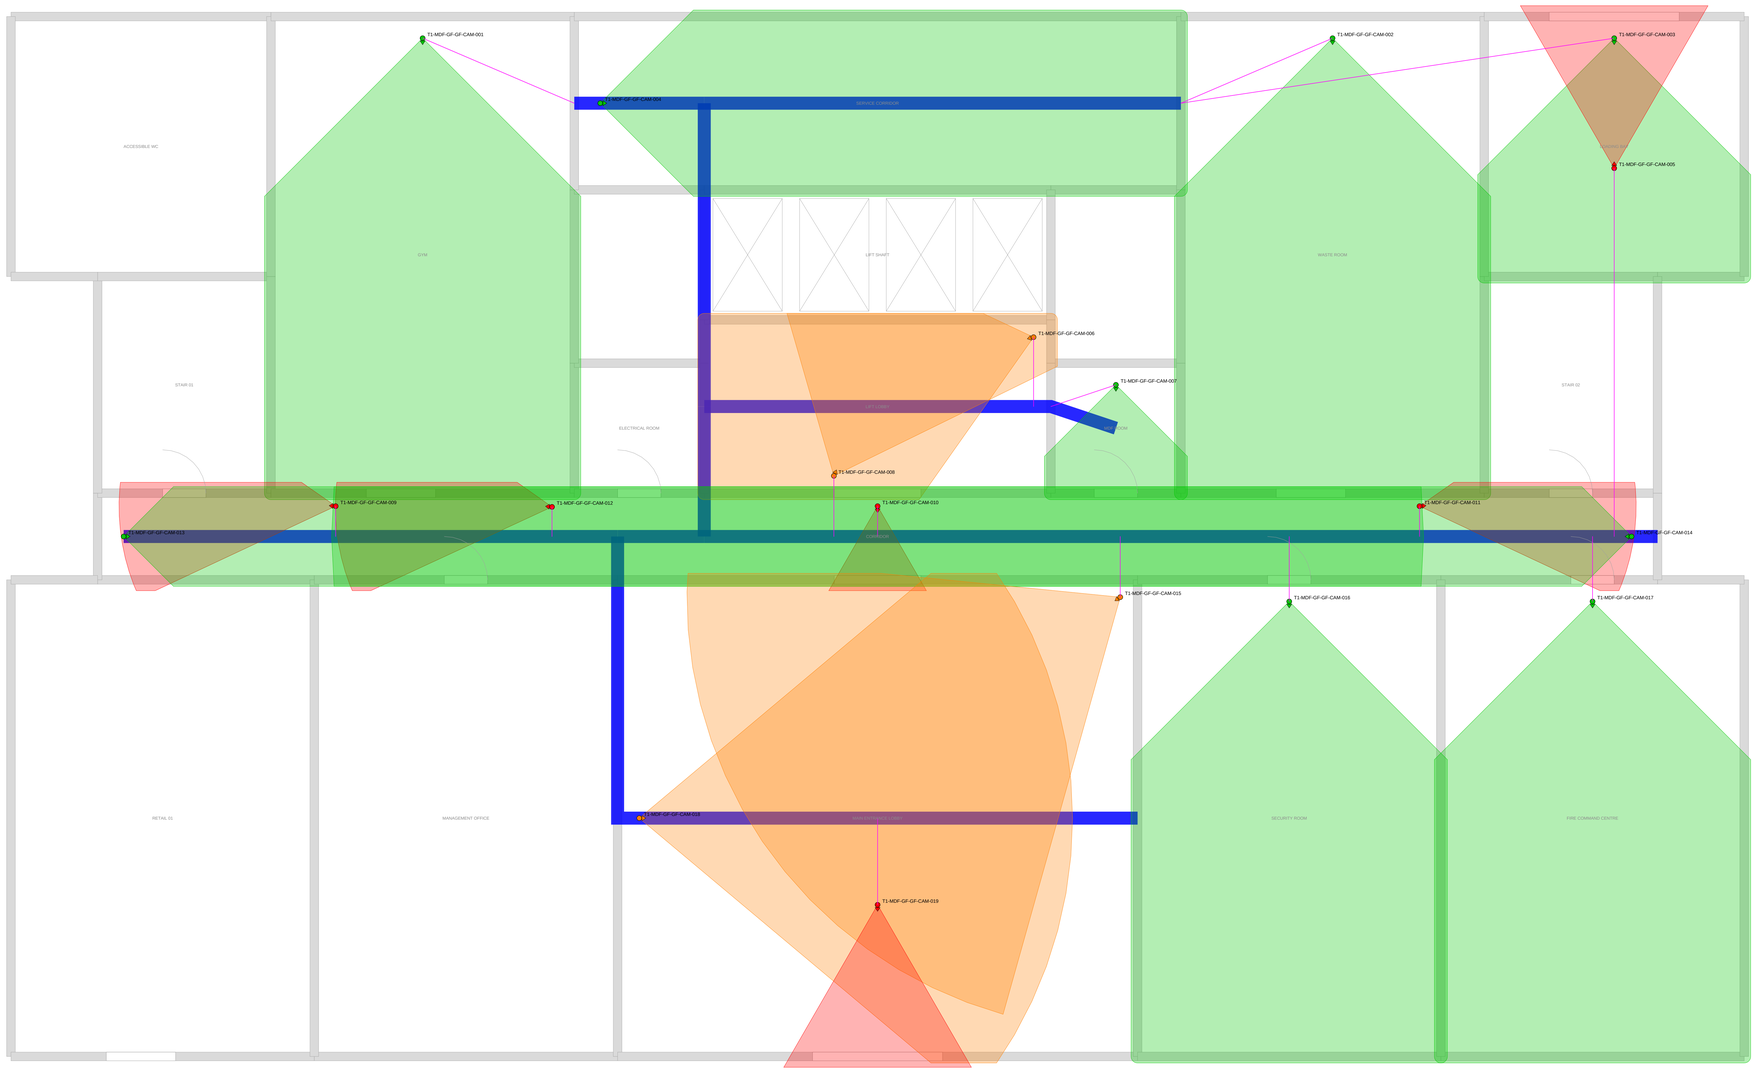

SN	CAMERA LEVEL	CAMERA TAG	CAMERA LOCATION	TILT	FOV	TYPE	LENS	MOUNTING	HEIGHT	IDF	CABLE m
1	GROUND FLOOR	T1-MDF-GF-GF-CAM-001	GYM	75°	10% DETECTION VIEW	DOME	3.2-10MM	Ceiling	2.6 m	T1-MDF-GF	30.7
2	GROUND FLOOR	T1-MDF-GF-GF-CAM-002	WASTE ROOM	75°	10% DETECTION VIEW	DOME	3.2-10MM	Wall	2.4 m	T1-MDF-GF	39.5
3	GROUND FLOOR	T1-MDF-GF-GF-CAM-003	LOADING BAY	75°	10% DETECTION VIEW	DOME	3.2-10MM	Wall	3.0 m	T1-MDF-GF	46.5
4	GROUND FLOOR	T1-MDF-GF-GF-CAM-004	SERVICE CORRIDOR	75°	10% DETECTION VIEW	DOME	3.2-10MM	Ceiling	2.6 m	T1-MDF-GF	25.9
5	GROUND FLOOR	T1-MDF-GF-GF-CAM-005	ENTRY	20°	120% IDENTIFICATION VIEW	DOME	2.8-12MM	Ceiling	2.4 m	T1-MDF-GF	51.3
6	GROUND FLOOR	T1-MDF-GF-GF-CAM-006	LIFT LOBBY	45°	25% OBSERVATION VIEW	DOME	3.2-10MM	Ceiling	2.6 m	T1-MDF-GF	8.9
7	GROUND FLOOR	T1-MDF-GF-GF-CAM-007	MDF ROOM	75°	10% DETECTION VIEW	DOME	3.2-10MM	Ceiling	2.6 m	T1-MDF-GF	8.5
8	GROUND FLOOR	T1-MDF-GF-GF-CAM-008	LIFT LOBBY	45°	25% OBSERVATION VIEW	DOME	3.2-10MM	Ceiling	2.6 m	T1-MDF-GF	23.7
9	GROUND FLOOR	T1-MDF-GF-GF-CAM-009	STAIR ENTRY	20°	120% IDENTIFICATION VIEW	DOME	2.8-12MM	Ceiling	2.4 m	T1-MDF-GF	29.0
10	GROUND FLOOR	T1-MDF-GF-GF-CAM-010	ENTRANCE LOBBY ENTRY	20°	120% IDENTIFICATION VIEW	DOME	2.8-12MM	Ceiling	2.4 m	T1-MDF-GF	24.0
11	GROUND FLOOR	T1-MDF-GF-GF-CAM-011	STAIR ENTRY	20°	120% IDENTIFICATION VIEW	DOME	2.8-12MM	Ceiling	2.4 m	T1-MDF-GF	37.8
12	GROUND FLOOR	T1-MDF-GF-GF-CAM-012	AMENITY ENTRY	20°	120% IDENTIFICATION VIEW	DOME	2.8-12MM	Ceiling	2.4 m	T1-MDF-GF	23.5

SN	CAMERA LEVEL	CAMERA TAG	CAMERA LOCATION	TILT	FOV	TYPE	LENS	MOUNTING	HEIGHT	IDF	CABLE m
13	GROUND FLOOR	T1-MDF-GF-GF-CAM-013	CORRIDOR	75°	10% DETECTION VIEW	DOME	3.2-10MM	Ceiling	2.6 m	T1-MDF-GF	33.6
14	GROUND FLOOR	T1-MDF-GF-GF-CAM-014	CORRIDOR	75°	10% DETECTION VIEW	DOME	3.2-10MM	Ceiling	2.6 m	T1-MDF-GF	42.4
15	GROUND FLOOR	T1-MDF-GF-GF-CAM-015	MAIN ENTRANCE LOBBY	45°	25% OBSERVATION VIEW	DOME	3.2-10MM	Ceiling	4.3 m	T1-MDF-GF	30.9
16	GROUND FLOOR	T1-MDF-GF-GF-CAM-016	SECURITY ROOM	75°	10% DETECTION VIEW	DOME	3.2-10MM	Ceiling	2.6 m	T1-MDF-GF	35.3
17	GROUND FLOOR	T1-MDF-GF-GF-CAM-017	FIRE COMMAND CENTRE	75°	10% DETECTION VIEW	DOME	3.2-10MM	Ceiling	2.6 m	T1-MDF-GF	43.0
18	GROUND FLOOR	T1-MDF-GF-GF-CAM-018	MAIN ENTRANCE LOBBY	45°	25% OBSERVATION VIEW	DOME	3.2-10MM	Ceiling	4.3 m	T1-MDF-GF	26.7
19	GROUND FLOOR	T1-MDF-GF-GF-CAM-019	ENTRY	20°	120% IDENTIFICATION VIEW	DOME	2.8-12MM	Ceiling	2.4 m	T1-MDF-GF	37.0

KEY PLAN



N

NOTES:

1. CAMERA HEIGHT WILL BE VERIFIED AS PER THE SITE CONDITION.
2. STAIRCASE CAMERA HEIGHT 2.4 METRE FROM THE STEP.
3. ALL DIMENSIONS IN MM ONLY OTHERWISE NOTED.
4. 1 NO. CAT6A CABLE FROM EACH CAMERA TO ITS IDF; NO COPPER CHANNEL TO EXCEED 90 M.
5. ALL CAMERAS ONVIF COMPLIANT AND NATIVELY SUPPORTED BY THE PROJECT VMS.
6. IK10 / IP66 FOR PUBLIC AND OUTDOOR AREAS; SURGE PROTETECTION FOR EXTERNAL AND POLE-MOUNTED UNITS.

LEGEND

SYMBOL	DESCRIPTION	QTY
	120%- IDENTIFICATION VIEW	6
	25%-OBSERVATION VIEW	4
	10%-DETECTION VIEW	9
	25MM CONDUIT OF CAT6A CABLE	-
	300x50 mm CABLE TRAY	-

DRAWING REFERENCE

ARCHITECTURAL MODEL: sample_tower.ifc

REV	DESCRIPTION	DATE	CHK
00	ISSUED FOR APPROVAL	09/10/2026	

PROJECT NAME & LOCATION
SAMPLE TOWER
DUBAI, UAE

CLIENT

LEAD CONSULTANT

MEP CONSULTANT

MAIN CONTRACTOR

ELV / SECURITY SYSTEM CONTRACTOR
CONTORA ENGINEERING

LOCATION DESCRIPTION
1 BASEMENT + GROUND + 3 TYPICAL FLOORS

DRAWING TITLE
GROUND FLOOR
CCTV LAYOUT

SCALE @ A0 - DRAWN - DATE
1:50 - ELV DRAFTSMAN - 09/10/2026

DRAWING NO. / REV.
XXXX-CTR-SDS-CCTV-GF-0002 REV 00